

Manual call point with SelfVerify - BF-300V2

Interactive fire detection systems
Product datasheet

Features

- Maximum 3-second response time
- Comprises a built-in indicator (LED)
- Can be tested by means of a special test key
- With SelfVerify function for reduced maintenance/testing and increased reliability
- Short-circuit isolator in each call point
- Automatic addressing
- Designed to meet the requirement of the major maritime classification societies
- Approved according to EN 54-11 and EN 54-17 for indoor applications

Applications

BF-300V2 is a manual call point for indoor use. The call point is designed for use with Autronica's interactive fire detection systems, and comprises the SelfVerify function. This function ensures the highest grade of reliability and the lowest degree of manual testing because all units comprising this function are automatically self-tested once every 24 hours.

The call point must be installed according to local regulations, which normally means along escape routes, landings and exits.

Operating method

- Press white plastic element. Resettable by means of dedicated test key.
- Optional: Break glass element. Resettable by mounting new glass element.

SelfVerify: the call point's ability to initiate alarm is regularly checked.

Versions

- BF-300V2
Manual call point with SelfVerify - standard version
- BF-510WP-H*
Manual call point with SelfVerify, weatherproof – high current version

*see separate datasheet




Technical specifications	
Weight	160 g
Material	ABS
Colour	Red
Voltage	16 – 26 VDC
Current consumption	
Stand by:	0,3mA
Alarm (LED):	6mA
Maximum current on detection loop	Standard version 200mA
CPD certificate	0333-CPD-075247
Degree of protection	IP44D with cover IP42D without cover
Working temperature	- 25 to + 70°C
Storage temperature	- 55 to + 70°C
Humidity (non-condensing)	Max. 95% RH
Service	Replace if faulty
Approvals	See website
Cable wire	Maximum 2,5 mm ²




Part number	Description
116-BF-300V2	Manual call point with SelfVerify. Standard version
Accessories	
116-4860-011.0100	Polycarbonate cover
116-CXBZ	BEZEL
116-BFG-3	Glass element

Connections

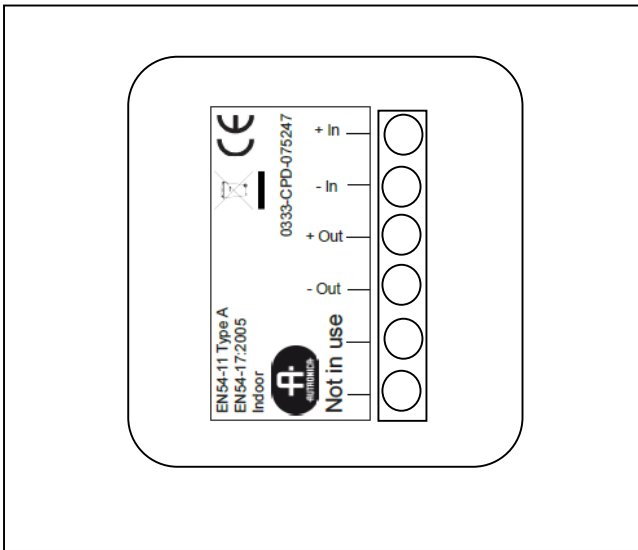

Dimensions

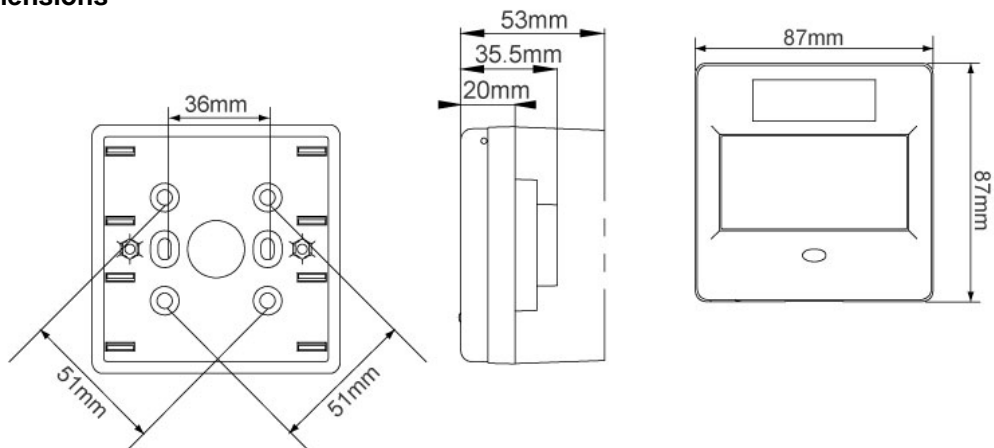

AUTRONICA FIRE AND SECURITY AS

Head office, Trondheim, Norway Tel: +47 73 58 25 00, fax: +47 73 58 25 01, e-mail: info@autronicafire.no
 Oil and Gas division, Stavanger, Norway Tel: +47 51 84 09 00, fax: +47 51 84 09 99
 Maritime division, Spikkestad, Norway Tel: +47 31 29 55 00, fax: +47 31 29 55 01

Visit Autronica Fire and Security AS' website: www.autronicafire.com